

MAGIKITCH'N

MKG24, 36, 48 - Gas Fired Griddle

Even Heating - Solid Construction Easy-To-Use

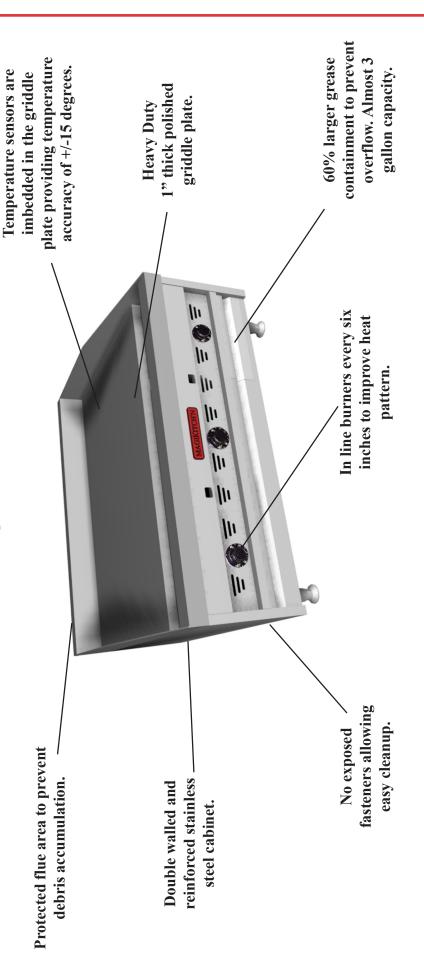



MKG24, 36, 48 - Gas Fired Griddle




Model	Overall Height	Working Height	Overall Depth	Overall Width	BTU's
MKG24	20.468"	15.75"	32.125"	24"	60,000
MKG36	20.468"	15.75"	32.125"	36"	90,000
MKG48	20.468"	15.75"	32.125"	48"	120,000

Four inch legs are included standard. Legs can be removed to flush mount griddle. Height dimensions with legs removed are minus 4".






AVAILABLE OPTIONS & ACCESSORIES



CONTROLS

- Thermostat maintains temperature between 200°F (93°C) and 400°F (204°C). Temperature accuracy +/-15°F.
- Integrated gas control valve acts as a manual and pilot valve, automatic pilot valve, gas filter, pressure regulator and automatic main valve.
- Gas control valve prevents gas flow to the main burner until pilot is established and shuts off all gas flow automatically if the pilot flame goes out.

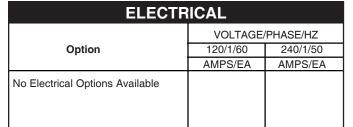







SHORT FORM SPECIFICATION

Provide MagiKitch'n counter model griddle. Unit shall be gas heated and shall cook by means of gas burners. Provide with independent gas burners. Individual burner controls shall be mounted every 12" for flexible use. Large 2.84 gallon capacity grease pan. Provide options and accessories as indicated.

TYPICAL APPLICATION

Cooking a wide variety of foods in a limited amount of space.

